

RA-20

Remote Annunciator Module

Together with GCU-20 Module or other ECU with Annunciator output

Features

- Works Up to 1500 Meters from The Host Module Using 18 AWG Cable (@12/24VDC)
- Universal LED Graphic Interface, Displays Generator Status and Failures
- Modular Design, Quick Installation
- Circuits are Finger Safe with UL94-V0 Epoxy Protection
- Simplify All Wiring with Pluggable Terminal Block
- Easy Assembly & Maintenance with No Chance of Wiring Mistakes



Icon Reference Table

Icon	Description	Icon	Description
	<ul style="list-style-type: none"> ● Low Oil Pressure Alarm ● Auxiliary Alarm (Flashing) 		<ul style="list-style-type: none"> ● Wrong speed Alarm ● No Speed Signal Alarm (Flashing)
	<ul style="list-style-type: none"> ● High Water Temperature Alarm 		<ul style="list-style-type: none"> ● Engine Running Indicator ● Engine IDLE Indicator (Flashing)
	<ul style="list-style-type: none"> ● Over Crank Alarm 		<ul style="list-style-type: none"> ● Common Alarm Indicator

Specifications

Rated Input Voltage	9 to 36 VDC
Working Distance from Host ECU	1500 Meters
Standard Cable	18 AWG

Terminal Block Capacity	300 VAC / 15A
Power Consumption	Under 1 watt


Environment

Operating Temperature	-20~70 °C
Storage Temperature	-35~85 °C
Relative Humidity	Maximum 90%

Physical Specification

Dimensions	88.0 (L) x 88.0 (W) x 37.5 (H) mm
Weight	143 g ±2%

Mechanical Specifications (Unit : mm[inch])

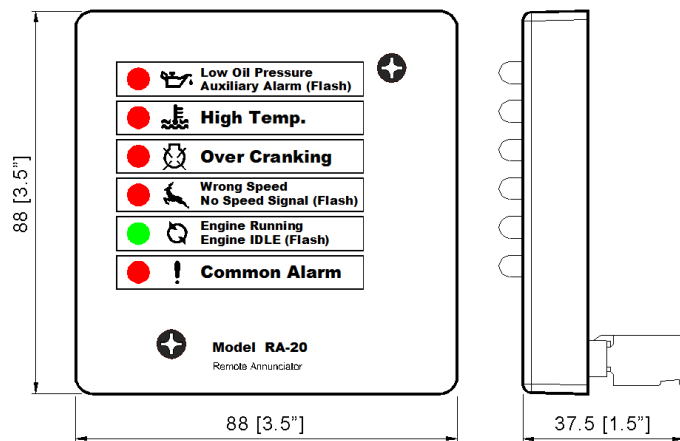

Installing Panel

